



EJARVIS
ECO GREEN TECHNOLOGY BATTERY

PROFESSIONAL
**BATTERY SOLUTION
PROVIDER**

WWW.JARVISCELL.COM

Table Of Content

| | | |
|----|-----------------------------|-------------|
| 01 | About Us | P : 01 |
| 02 | Business Solution | P : 02 |
| 03 | Why Choose Us | P : 03 |
| 04 | South East Asia | P : 04 - 05 |
| 05 | Terminal Types and Position | P : 06 |
| 06 | GP General Purpose Series | P : 07 - 09 |
| 07 | DC Deep Cycle Series | P : 10 - 11 |
| 08 | DG Deep Cycle Gel Series | P : 12 - 13 |
| 09 | GE Gel Series | P : 14 - 15 |
| 10 | FT Front Terminal Series | P : 16 - 17 |
| 11 | HR High Rate Series | P : 18 - 19 |
| 12 | OPzV Series | P : 20 - 21 |
| 13 | PG+2V Prolong Life Series | P : 22 - 23 |
| 14 | PG+12V Prolong Life Series | P : 24 - 25 |



About Us

JARVISCELL SDN BHD stands as the preeminent manufacturer and battery distributor in Malaysia. We specialize in the production of a comprehensive range of VRLA batteries, such as General Purpose, Deep Cycle, Front Terminal, High Rate, Gel, and many more. Over time, JARVISCELL has become renowned for its commitment to reliable, cost-effective, and environmentally friendly VRLA batteries, and there is no end in sight to its ongoing growth and development.

With decades of experience in the energy industry, JARVISCELL SDN BHD places a strong emphasis on technological innovation and the cultivation of talent to enhance the qualifications of our workforce. Our management is dedicated to maintaining the highest standards of quality and providing excellent customer service. We have achieved ISO9001, ISO14001, GB/T28001 (OHSAS18001) certifications, and have obtained TLC, CE, ROHS, IEC, and numerous other accolades.

As pioneers in the development and production of high-quality VRLA batteries and solutions to meet the insatiable demand for backup power, we have taken the initiative to employ cutting-edge, state-of-the-art

robotic machinery in our manufacturing processes, ensuring the highest quality battery products for an ever-expanding market.

With robust support from our in-house scientific research capabilities, JARVISCELL SD BHD has established a professional research and development center dedicated to battery manufacturing. Our commitment to "Technology, R&D, Innovation, and Breakthrough" sets us apart from the competition. JARVISCELL. SDN BHD is unwavering in its dedication to improving product quality and continually developing new solutions to meet the evolving needs of society, the market, and our valued customers.

Business Solutions

EJARVIS battery products are widely used in various areas such as UPS, solar energy systems, wind energy systems, finance, taxation, communications, postal services, power, media, transportation, aerospace, petrochemical, military, marine, medical, mining industries, education, etc.

Simultaneously, EJARVIS has established long-term partnerships with domestic and foreign UPS power system manufacturers, domestic and foreign banking systems, governments at all levels, colleges, universities, electric power stations and plants, solar/wind energy system suppliers, EPS/Switching power suppliers, telecommunication system suppliers, etc.



Why Choose Us?

Our batteries excel with precision injection cases, lead-tin alloy grids, robust welding methods, heat-sealed inner formation, meticulous capacity sorting, and innovative lead carbon/fast charge technology. These features ensure unparalleled performance, reliability, and efficiency, setting our products apart in the market.

✔ Manufactured using the latest technology and stringent quality control, our battery product are designed to exceed in performance and reliability.

✔ Our focused approach to exceptional end to end customer experience sets us apart from the competition. From enquiry to delivery and everything in between we regularly exceed our customer expectations.

✔ Delivery on time, every time to customer specifications. We pride ourself on offering tailored service solution to meet our customer exact specifications.



Business Philosophy


Our philosophy guides into providing products of superior quality, backed with our professional technical support, and unsurpassed customer service



MYANMAR



VIETNAM




LAOS



CAMBODIA




THAILAND



MALAYSIA



SINGAPORE

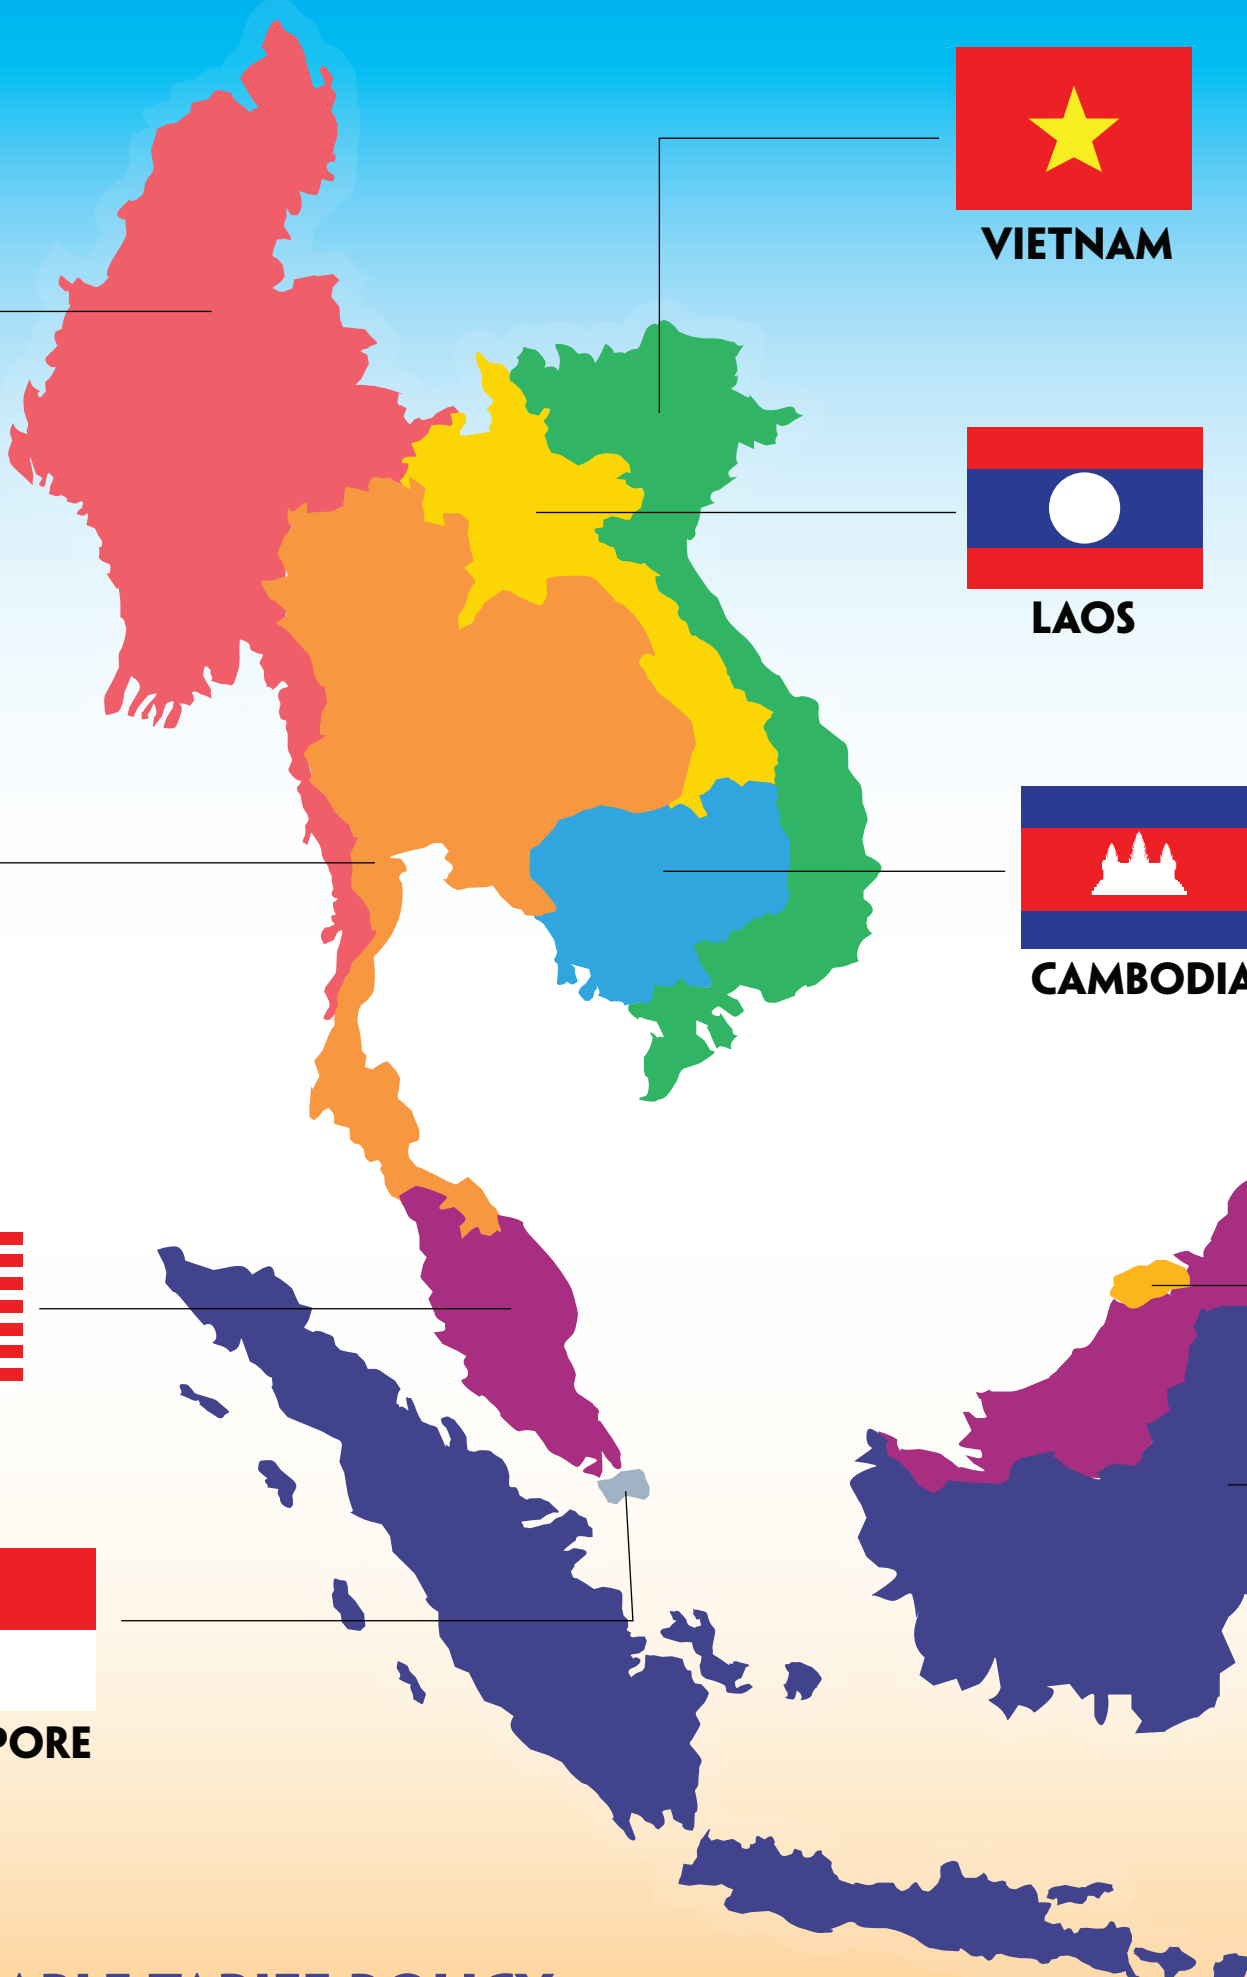

FAVOURABLE TARIFF POLICY

Malaysia's trade policy aims to create a fairer and freer global trade environment, so you can enjoy favourable tariff policies and reduce the costs.

ASEAN

MALAYSIA, BRUNEI, CAMBODIA, MYANMAR, INDONESIA, LAOS, PHILIPPINES, SINGAPORE, THAILAND, VIETNAM

MIDDLE EAST


BAHRAIN, IRAQ, JORDAN, KUWAIT, LEBANON, OMAN, PALESTINE, QATAR, SAUDI ARABIA, SYRIA, UNITED ARAB EMIRATES, YEMEN

SOUTH AMERICA

ARGENTINA, BRAZIL, BOLIVIA, CHILE, COLOMBIA, ECUADOR, GUYANA, PARAGUAY, PERU, SURINAME, URUGUAY, VENEZUELA

NORTH AMERICA

UNITED STATES OF AMERICA, CANADA, MEXICO

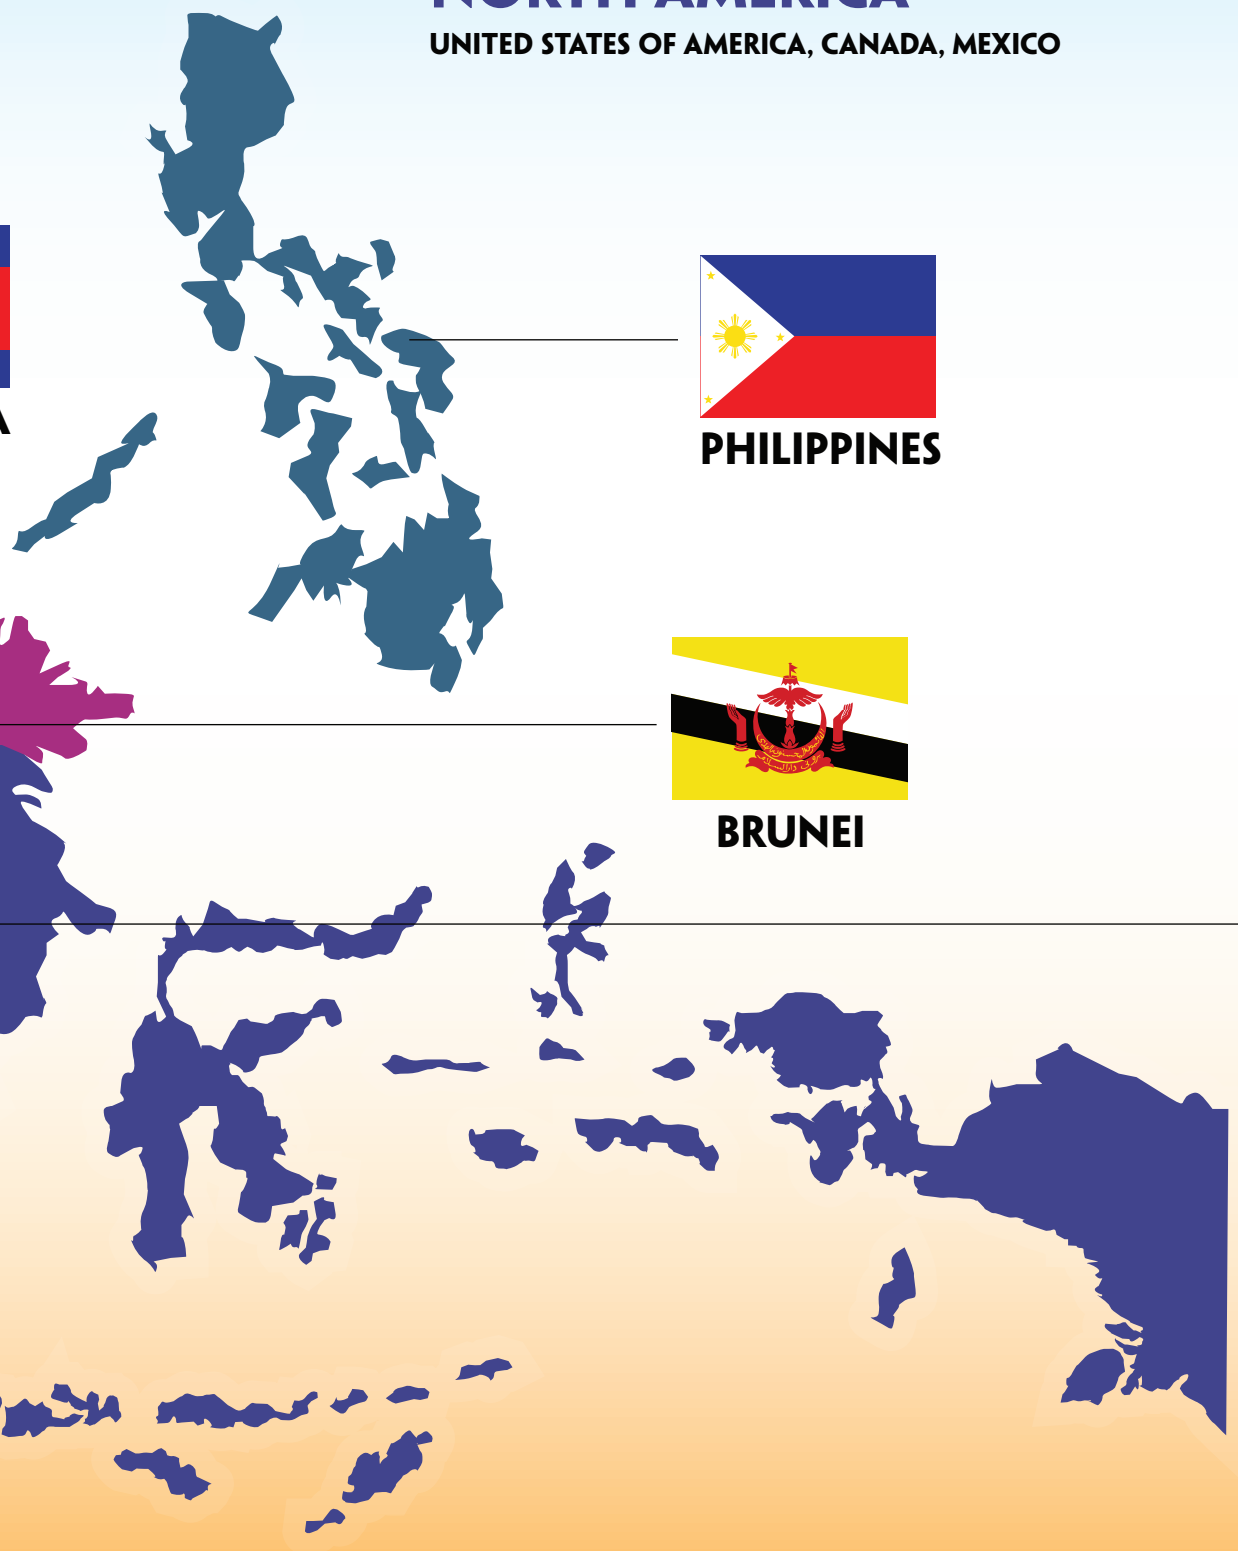

PHILIPPINES












BRUNEI




INDONESIA

TERMINALS
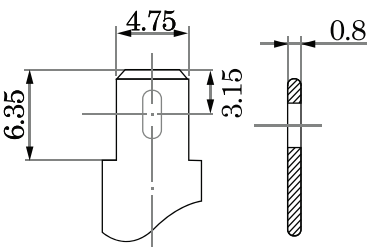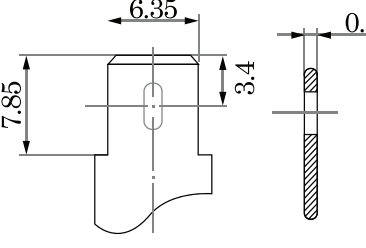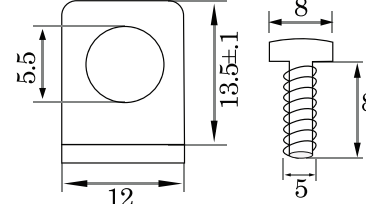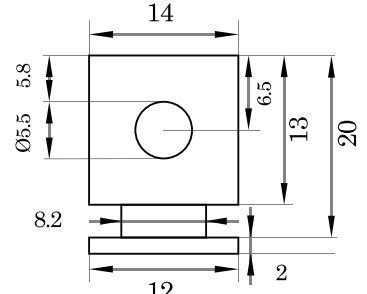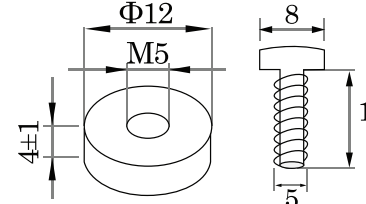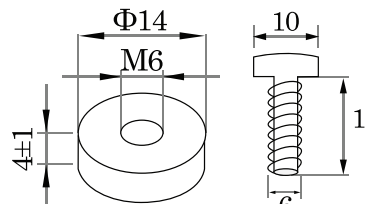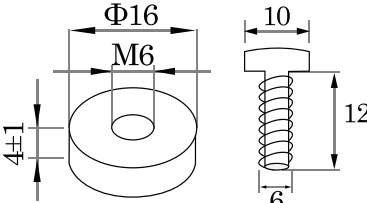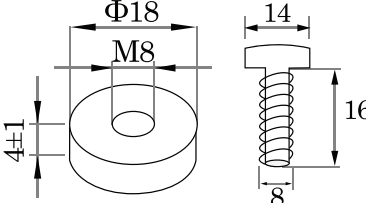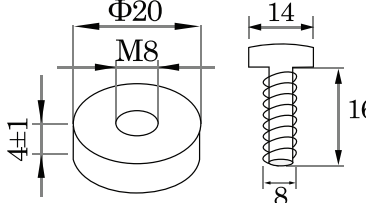
| | | |
|--|--|---|
| <p>F1 Terminal</p>  | <p>F2 Terminal</p>  | <p>Terminal B1</p>  <p>Torque 3.95~5.4N*m</p> |
| <p>Terminal B2</p>  <p>Torque 3.95~5.4N*m</p> | <p>T1 Terminal</p>  <p>Torque 4~6N*m</p> | <p>T2 Terminal</p>  <p>Torque 4~6N*m</p> |
| <p>T3 Terminal</p>  <p>Torque 8~10N*m</p> | <p>T4 Terminal</p>  <p>Torque 10~12N*m</p> | <p>T5 Terminal</p>  <p>Torque 10~12N*m</p> |

TERMINALS POSITION

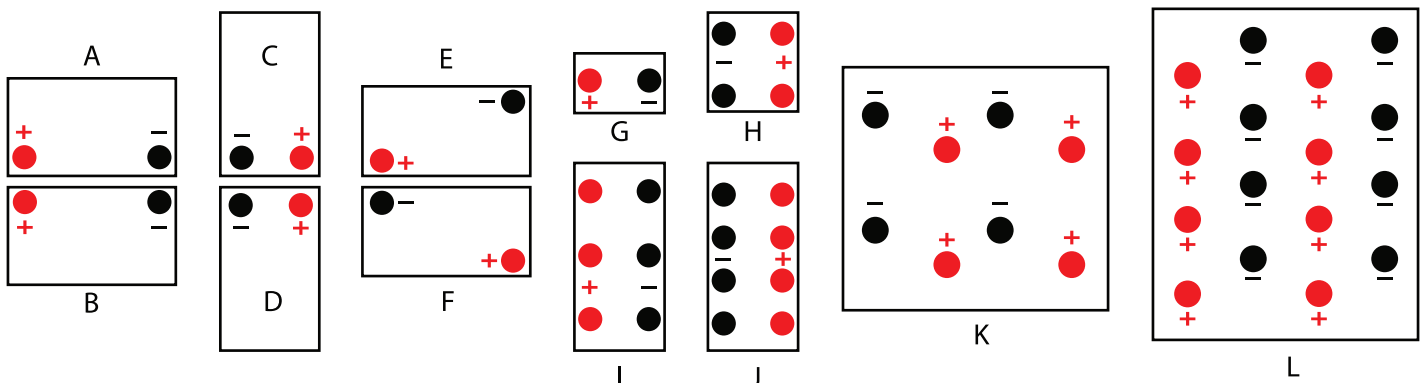

GP SERIES

General Purpose AGM Rechargeable VRLA Batteries



EQUIPMENT



TOYS



UTILITY



TELCO



MEDICAL



EPS



UPS

EJARVIS GP General Purpose Series of sealed lead acid batteries have been designed with AGM (Absorbent Glass Mat) technology to ensure superior performance and reliability.

The EJ series has been explicitly engineered for general-purpose standby and light cyclic applications, including security, fire protection systems, emergency lighting, UPS and medical devices.

EJARVIS state-of-the-art manufacturing and process control and meticulous quality assurance procedures guarantee consistent and dependable performance.

GP SERIES

General Purpose AGM Rechargeable VRLA Batteries

BATTERIES WITH :

UL94:HB CASE AND COVER UL94:V-O FLAME RETARDANT CASE AND COVER

FEATURES

- General purpose VRLA battery
- Absorbent Glass Mat (AGM) technology for superior performance
- Low self-discharge rate for long shelf life
- Power to volume ratio yielding unrivalled energy density
- Introducing latest Power Wave Frame technology that create concentrated high density wave grid that ensure excellent performance in deep discharge situations
- Proven valve regulated technology that guarantees safe operation without maintenance
- Rugged impact resistant ABS case and cover

| Model | Voltage | Capacity | Dimension | | | | | | | | Weight | | Terminal | |
|----------|---------|----------|-----------|-------|-------|-------|--------|------|----------|------|--------|--------|----------|--------|
| | | | Length | | Width | | Height | | T.Height | | kg | Lb | Type | Layout |
| | | | mm | inch | mm | inch | mm | inch | mm | inch | | | | |
| GP1.3-12 | 12 | 1.3 | 98 | 3.86 | 45 | 1.77 | 52 | 2.05 | 59 | 2.32 | 0.56 | 1.23 | F1 | C |
| GP2.3-12 | 12 | 2.3 | 178 | 7.01 | 34 | 1.34 | 60 | 2.36 | 66 | 2.6 | 0.9 | 1.98 | F1 | A |
| GP3.2-12 | 12 | 3.2 | 134 | 5.28 | 67 | 2.64 | 60 | 2.36 | 66 | 2.6 | 1.25 | 2.76 | F1 | C |
| GP4-12 | 12 | 4 | 90 | 3.54 | 70 | 2.76 | 101 | 3.98 | 106 | 4.17 | 1.25 | 2.77 | F1/F2 | A |
| GP4.5-12 | 12 | 4.5 | 90 | 3.54 | 70 | 2.76 | 101 | 3.98 | 106 | 4.17 | 1.35 | 2.98 | F1/F2 | A |
| GP5.0-12 | 12 | 5 | 90 | 3.54 | 70 | 2.76 | 101 | 3.98 | 106 | 4.17 | 1.41 | 3.11 | F1/F2 | A |
| GP6.5-12 | 12 | 6.5 | 151 | 5.94 | 65 | 2.56 | 94 | 3.7 | 100 | 3.94 | 1.9 | 4.19 | F1/F2 | D |
| GP7.0-12 | 12 | 7 | 151 | 5.94 | 65 | 2.56 | 94 | 3.7 | 100 | 3.94 | 2 | 4.41 | F1/F2 | D |
| GP7.2-12 | 12 | 7.2 | 151 | 5.94 | 65 | 2.56 | 94 | 3.7 | 100 | 3.94 | 2.1 | 4.74 | F1/F2 | D |
| GP8-12 | 12 | 8 | 151 | 5.94 | 65 | 2.56 | 94 | 3.7 | 100 | 3.94 | 2.2 | 5.2 | F1/F2 | D |
| GP9.0-12 | 12 | 9 | 151 | 5.94 | 65 | 2.56 | 94 | 3.7 | 100 | 3.94 | 2.4 | 5.51 | F1/F2 | D |
| GP10-12 | 12 | 10 | 151 | 5.94 | 98 | 3.86 | 94 | 3.7 | 100 | 3.94 | 3.05 | 6.72 | F1/F2 | D |
| GP12-12 | 12 | 12 | 151 | 5.94 | 98 | 3.86 | 94 | 3.7 | 100 | 3.94 | 3.3 | 7.28 | F1/F2 | D |
| GP17-12 | 12 | 17 | 181 | 7.13 | 77 | 3.03 | 167 | 6.57 | 167 | 6.57 | 4.7 | 10.36 | B1/T1 | B |
| GP18-12 | 12 | 18 | 181 | 7.13 | 77 | 3.03 | 167 | 6.57 | 167 | 6.57 | 5 | 11.02 | B1/T1 | B |
| GP24-12 | 12 | 24 | 175 | 6.89 | 166 | 6.54 | 125 | 4.92 | 127 | 5 | 7.2 | 15.87 | B2/T1 | B |
| GP26-12 | 12 | 26 | 166 | 6.54 | 125 | 4.92 | 175 | 6.89 | 182 | 7.17 | 7.4 | 16.31 | T2 | B |
| GP28-12 | 12 | 28 | 175 | 6.89 | 166 | 6.54 | 125 | 4.92 | 127 | 5 | 7.8 | 17.2 | B2/T1 | B |
| GP33-12 | 12 | 33 | 196 | 7.72 | 131 | 5.16 | 155 | 6.1 | 180 | 7.09 | 9.8 | 21.61 | T2 | A |
| GP40-12 | 12 | 40 | 197 | 7.76 | 165 | 6.5 | 175 | 6.89 | 175 | 6.89 | 11.8 | 26.01 | T2 | B |
| GP45-12 | 12 | 45 | 197 | 7.76 | 165 | 6.5 | 175 | 6.89 | 183 | 6.89 | 13.5 | 29.76 | T2 | B |
| GP55-12 | 12 | 55 | 230 | 9.06 | 138 | 5.43 | 211 | 8.31 | 229 | 9.02 | 15.1 | 33.29 | T2 | A |
| GP65-12 | 12 | 65 | 350 | 13.78 | 178 | 7.01 | 175 | 6.89 | 179 | 7.05 | 18.6 | 41 | T3 | B |
| GP75-12 | 12 | 75 | 260 | 10.24 | 169 | 6.65 | 211 | 8.31 | 214 | 8.43 | 21 | 45.86 | T3 | A |
| GP80-12 | 12 | 80 | 307 | 12.09 | 169 | 6.65 | 208 | 8.19 | 215 | 8.46 | 24.8 | 54.7 | T4 | A |
| GP100-12 | 12 | 100 | 331 | 13.03 | 173 | 6.81 | 213 | 8.39 | 218 | 8.58 | 28.1 | 61.95 | T4 | A |
| GP120-12 | 12 | 120 | 407 | 16.02 | 174 | 6.85 | 209 | 8.23 | 233 | 9.17 | 33 | 72.75 | T4 | A |
| GP150-12 | 12 | 150 | 484 | 19.06 | 170 | 6.69 | 240 | 9.45 | 240 | 9.45 | 41 | 90.39 | T5 | A |
| GP200-12 | 12 | 200 | 522 | 20.55 | 240 | 9.45 | 216 | 8.5 | 240 | 9.45 | 55 | 120.81 | T5 | C |
| GP250-12 | 12 | 250 | 520 | 20.47 | 268 | 10.55 | 220 | 8.66 | 243 | 9.57 | 65 | 143.3 | T5 | C |

| Model | Voltage | Capacity | Dimension | | | | | | | | Weight | | Terminal | |
|----------|---------|----------|-----------|-------|-------|-------|--------|-------|----------|-------|--------|--------|----------|--------|
| | | | Length | | Width | | Height | | T.Height | | kg | Lb | Type | Layout |
| | | | mm | inch | mm | inch | mm | inch | mm | inch | | | | |
| GP100-2 | 2 | 100 | 171 | 6.73 | 72 | 2.83 | 205 | 8.07 | 210 | 8.27 | 5.5 | 12.13 | T5 | G |
| GP150-2 | 2 | 150 | 171 | 6.73 | 102 | 4.02 | 206 | 8.11 | 221 | 8.7 | 7.4 | 16.31 | T5 | G |
| GP200-2 | 2 | 200 | 171 | 6.73 | 111 | 4.37 | 330 | 12.99 | 364 | 14.33 | 11.5 | 25.35 | T5 | G |
| GP300-2 | 2 | 300 | 171 | 6.73 | 151 | 5.94 | 330 | 12.99 | 364 | 14.33 | 16.2 | 35.71 | T5 | G |
| GP400-2 | 2 | 400 | 210 | 8.27 | 176 | 6.93 | 330 | 12.99 | 367 | 14.45 | 22.6 | 49.82 | T5 | G |
| GP500-2 | 2 | 500 | 241 | 9.49 | 171 | 6.73 | 330 | 12.99 | 365 | 14.37 | 26.5 | 58.42 | T5 | G |
| GP600-2 | 2 | 600 | 302 | 11.89 | 175 | 6.89 | 330 | 12.99 | 367 | 14.45 | 32 | 70.55 | T5 | G |
| GP800-2 | 2 | 800 | 410 | 16.14 | 175 | 6.89 | 330 | 12.99 | 367 | 14.45 | 44 | 97 | T5 | H |
| GP1000-2 | 2 | 1000 | 475 | 18.7 | 175 | 6.89 | 330 | 12.99 | 367 | 14.45 | 52 | 114.6 | T5 | H |
| GP1500-2 | 2 | 1500 | 400 | 15.75 | 350 | 13.78 | 345 | 13.58 | 382 | 15.04 | 85 | 187.39 | T5 | H |
| GP2000-2 | 2 | 2000 | 490 | 19.29 | 350 | 13.78 | 345 | 13.58 | 382 | 15.04 | 106 | 233.7 | T5 | I |
| GP3000-2 | 2 | 3000 | 710 | 27.95 | 350 | 13.78 | 345 | 13.58 | 382 | 15.04 | 152 | 335 | T5 | J |

| Model | Voltage | Capacity | Dimension | | | | | | | | Weight | | Terminal | |
|---------|---------|----------|-----------|------|-------|------|--------|------|----------|------|--------|------|----------|--------|
| | | | Length | | Width | | Height | | T.Height | | kg | Lb | Type | Layout |
| | | | mm | inch | mm | inch | mm | inch | mm | inch | | | | |
| GP4-4 | 4 | 4 | 47 | 1.85 | 47 | 1.85 | 102 | 4.02 | 107 | 4.21 | 0.45 | 0.99 | F1 | C |
| GP4.5-4 | 4 | 4.5 | 47 | 1.85 | 47 | 1.85 | 102 | 4.02 | 107 | 4.21 | 0.48 | 1.05 | F1 | C |
| GP5-4 | 4 | 5 | 47 | 1.85 | 47 | 1.85 | 102 | 4.02 | 107 | 4.21 | 0.52 | 1.15 | F1 | C |

| Model | Voltage | Capacity | Dimension | | | | | | | | Weight | | Terminal | |
|---------|---------|----------|-----------|------|-------|------|--------|------|----------|------|--------|------|----------|--------|
| | | | Length | | Width | | Height | | T.Height | | kg | Lb | Type | Layout |
| | | | mm | inch | mm | inch | mm | inch | mm | inch | | | | |
| GP1.3-6 | 6 | 1.3 | 98 | 3.86 | 25 | 0.98 | 52 | 2.05 | 56 | 2.2 | 0.28 | 0.62 | F1 | A |
| GP2.8-6 | 6 | 2.8 | 66 | 2.6 | 33 | 1.3 | 97 | 3.82 | 103 | 4.06 | 0.55 | 1.21 | F1 | E |
| GP3.2-6 | 6 | 3.2 | 134 | 5.28 | 34 | 1.34 | 61 | 2.4 | 66 | 2.6 | 0.62 | 1.37 | F1 | A |
| GP4.0-6 | 6 | 4 | 70 | 2.76 | 48 | 1.89 | 101 | 3.98 | 106 | 4.17 | 0.63 | 1.38 | F1/F2 | E |
| GP4.5-6 | 6 | 4.5 | 70 | 2.76 | 48 | 1.89 | 101 | 3.98 | 106 | 4.17 | 0.68 | 1.5 | F1/F2 | E |
| GP5.0-6 | 6 | 5 | 70 | 2.76 | 48 | 1.89 | 101 | 3.98 | 106 | 4.17 | 0.71 | 1.68 | F1/F2 | E |
| GP7.0-6 | 6 | 7 | 151 | 5.94 | 34 | 1.34 | 94 | 3.7 | 100 | 3.94 | 1.05 | 2.31 | F1/F2 | A |
| GP8.0-6 | 6 | 8 | 151 | 5.94 | 34 | 1.34 | 94 | 3.7 | 100 | 3.94 | 1.1 | 2.4 | F1/F2 | A |
| GP10-6 | 6 | 10 | 151 | 5.94 | 50 | 1.97 | 94 | 3.7 | 100 | 3.94 | 1.6 | 3.53 | F1/F2 | A |
| GP12-6 | 6 | 12 | 151 | 5.94 | 50 | 1.97 | 94 | 3.7 | 100 | 3.94 | 1.65 | 3.64 | F1/F2 | A |
| GP14-6 | 6 | 14 | 151 | 5.94 | 50 | 1.97 | 94 | 3.7 | 100 | 3.94 | 1.8 | 3.97 | F1/F2 | A |

FURTHER INFORMATION

Please refer to our website www.jarviscell.com for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certificatio, etc.

To ensure safe and efficient operation always refer to the latest edition of our Technical Manual as published on our website.

© 2023 Jarviscell Sdn Bhd. All rights reserved. All trademarks are the property of their respective owners.

All date subject to change without notice E&OE

DC SERIES

Solar Deep Cycle AGM Rechargeable VRLA Batteries



EQUIPMENT



TOYS



UTILITY



TELCO



MEDICAL



EPS



UPS

EJARVIS Deep Cycle DC series of Solar Deep Cycle AGM batteries provide enhanced performance and excellent reliability in long-duration cycling applications.

Using our latest technology Power Wave Frame Technology together with specialized paste formulation ensures constant power for longer periods without shortening the battery's life. Purpose-built for applications that require regular and consistent cycling (charge and discharge), the EJARVIS DC series offer an exceptionally long cycle life compared to general-purpose AGM batteries making them ideal for mobility, medical, and solar renewable energy applications.

EJARVIS state-of-the-art manufacturing and process control and meticulous quality assurance procedures guarantee consistent and dependable performance.

DC SERIES

Solar Deep Cycle AGM Rechargeable VRLA Batteries

BATTERIES WITH : UL94:HB CASE AND COVER UL94:V-0 FLAME RETARDANT CASE AND COVER

FEATURES

- Deep Cycle AGM battery
- Absorbent Glass Mat (AGM) technology for superior performance
- Special unique additives paste formulation design with combination use of high purity lead account for superb corrosion resistance and create longer life deep cycle performance
- Power to volume ratio yielding unrivalled energy density
- Introducing latest Power Wave Frame technology that create concentrated high density wave grid that ensure excellent performance in deep discharge situations
- Proven valve regulated technology that guarantees safe operation without maintenance
- Rugged impact resistant ABS case and cover

| Model | Voltage | Capacity | Dimension | | | | | | | | Weight | | Terminal | |
|----------|---------|----------|-----------|-------|-------|-------|--------|------|----------|------|--------|--------|----------|--------|
| | | | Length | | Width | | Height | | T.Height | | kg | Lb | Type | Layout |
| | | | mm | inch | mm | inch | mm | inch | mm | inch | | | | |
| DC7-12 | 12 | 7 | 151 | 5.94 | 65 | 2.56 | 94 | 3.7 | 100 | 3.94 | 2.18 | 4.81 | F1/F2 | D |
| DC12-12 | 12 | 12 | 151 | 5.94 | 98 | 3.86 | 94 | 3.7 | 100 | 3.94 | 3.5 | 7.72 | F1/F2 | D |
| DC18-12 | 12 | 18 | 181 | 7.13 | 77 | 3.03 | 167 | 6.57 | 167 | 6.57 | 5.3 | 11.7 | B1/T1 | B |
| DC26-12 | 12 | 26 | 175 | 6.89 | 166 | 6.54 | 126 | 4.96 | 126 | 4.96 | 7.37 | 16.2 | B2/T1 | B |
| DC33-12 | 12 | 33 | 196 | 7.72 | 131 | 5.16 | 155 | 6.1 | 180 | 7.09 | 10.2 | 22.5 | T2 | A |
| DC40-12 | 12 | 40 | 197 | 7.76 | 165 | 6.5 | 175 | 6.89 | 175 | 6.89 | 13.5 | 29.76 | T2 | B |
| DC50-12 | 12 | 50 | 230 | 9.06 | 138 | 5.43 | 211 | 8.31 | 229 | 9.02 | 15.1 | 33.3 | T2 | A |
| DC65-12 | 12 | 65 | 350 | 13.78 | 178 | 7.01 | 179 | 7.05 | 179 | 7.05 | 19 | 41.89 | T3 | B |
| DC70-12 | 12 | 70 | 260 | 10.24 | 169 | 6.65 | 210 | 8.27 | 214 | 8.43 | 21 | 46.29 | T3 | A |
| DC80-12 | 12 | 80 | 260 | 10.24 | 169 | 6.65 | 211 | 8.31 | 215 | 8.46 | 23 | 50.71 | T3 | A |
| DC90-12 | 12 | 90 | 307 | 12.09 | 169 | 6.65 | 208 | 8.19 | 212 | 8.35 | 25 | 55.1 | T4 | A |
| DC100-12 | 12 | 100 | 331 | 13.03 | 173 | 6.81 | 213 | 8.39 | 218 | 8.58 | 30 | 66.15 | T4 | A |
| DC120-12 | 12 | 120 | 407 | 16.02 | 174 | 6.85 | 209 | 8.23 | 233 | 9.17 | 33.5 | 73.9 | T4 | A |
| DC150-12 | 12 | 150 | 484 | 19.06 | 170 | 6.69 | 240 | 9.45 | 240 | 9.45 | 43.3 | 95.5 | T5 | A |
| DC200-12 | 12 | 200 | 522 | 20.55 | 240 | 9.45 | 216 | 8.5 | 240 | 9.45 | 57 | 125.69 | T5 | C |
| DC250-12 | 12 | 250 | 520 | 20.47 | 268 | 10.55 | 220 | 8.66 | 243 | 9.57 | 66 | 145.53 | T5 | C |

FURTHER INFORMATION

Please refer to our website www.jarviscell.com for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certificatio, etc.


To ensure safe and efficient operation always refer to the latest edition of our Technical Manual as published on our website.

© 2023 Jarviscell Sdn Bhd. All rights reserved. All trademarks are the property of their respective owners.

All date subject to change without notice E&OE

DG SERIES

Solar Deep Cycle Gel AGM Rechargeable VRLA Batteries

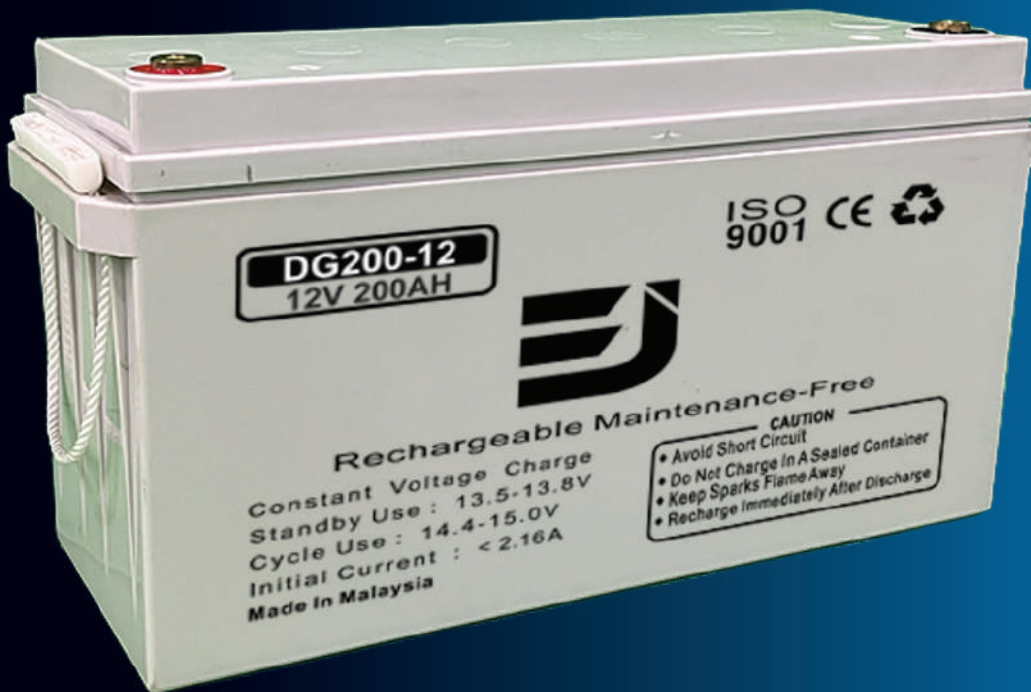

EQUIPMENT



TOYS



UTILITY



TELCO



MEDICAL



EPS



UPS

EJARVIS Deep Cycle Gel DG series of Solar Deep Cycle AGM batteries provide enhanced performance and excellent reliability in long-duration cycling applications.

Using our latest technology Power Wave Frame Technology together with specialized paste formulation ensures constant power for longer periods without shortening the battery's life. Purpose-built for applications that require regular and consistent cycling (charge and discharge), the EJARVIS DC series offer an exceptionally long cycle life compared to general-purpose AGM batteries making them ideal for mobility, medical, and solar renewable energy applications.

EJARVIS state-of-the-art manufacturing and process control and meticulous quality assurance procedures guarantee consistent and dependable performance.

DG SERIES

Solar Deep Cycle Gel AGM Rechargeable VRLA Batteries

BATTERIES WITH :

UL94:HB CASE AND COVER UL94:V-0 FLAME RETARDANT CASE AND COVER

FEATURES

- Deep Cycle Gel AGM battery
- Absorbent Glass Mat (AGM) technology for superior performance
- Special unique additives paste formulation design with combination use of high purity lead account for superb corrosion resistance and create longer life deep cycle performance
- Power to volume ratio yielding unrivalled energy density
- Introducing latest Power Wave Frame technology that create concentrated high density wave grid that ensure excellent performance in deep discharge situations
- Proven valve regulated technology that guarantees safe operation without maintenance
- Rugged impact resistant ABS case and cover

| Model | Voltage | Capacity | Dimension | | | | | | | | Weight | | Terminal | |
|----------|---------|----------|-----------|-------|-------|-------|--------|------|----------|------|--------|--------|----------|--------|
| | | | Length | | Width | | Height | | T.Height | | kg | Lb | Type | Layout |
| | | | mm | inch | mm | inch | mm | inch | mm | inch | | | | |
| DG7-12 | 12 | 7 | 151 | 5.94 | 65 | 2.56 | 94 | 3.7 | 100 | 3.94 | 2.18 | 4.81 | F1/F2 | D |
| DG12-12 | 12 | 12 | 151 | 5.94 | 98 | 3.86 | 94 | 3.7 | 100 | 3.94 | 3.5 | 7.72 | F1/F2 | D |
| DG18-12 | 12 | 18 | 181 | 7.13 | 77 | 3.03 | 167 | 6.57 | 167 | 6.57 | 5.3 | 11.7 | B1/T1 | B |
| DG26-12 | 12 | 26 | 175 | 6.89 | 166 | 6.54 | 126 | 4.96 | 126 | 4.96 | 7.37 | 16.2 | B2/T1 | B |
| DG33-12 | 12 | 33 | 196 | 7.72 | 131 | 5.16 | 155 | 6.1 | 180 | 7.09 | 10.2 | 22.5 | T2 | A |
| DG40-12 | 12 | 40 | 197 | 7.76 | 165 | 6.5 | 175 | 6.89 | 175 | 6.89 | 13.5 | 29.76 | T2 | B |
| DG50-12 | 12 | 50 | 230 | 9.06 | 138 | 5.43 | 211 | 8.31 | 229 | 9.02 | 15.1 | 33.3 | T2 | A |
| DG65-12 | 12 | 65 | 350 | 13.78 | 178 | 7.01 | 179 | 7.05 | 179 | 7.05 | 19 | 41.89 | T3 | B |
| DG70-12 | 12 | 70 | 260 | 10.24 | 169 | 6.65 | 210 | 8.27 | 214 | 8.43 | 21 | 46.29 | T3 | A |
| DG80-12 | 12 | 80 | 260 | 10.24 | 169 | 6.65 | 211 | 8.31 | 215 | 8.46 | 23 | 50.71 | T3 | A |
| DG90-12 | 12 | 90 | 307 | 12.09 | 169 | 6.65 | 208 | 8.19 | 212 | 8.35 | 25 | 55.1 | T4 | A |
| DG100-12 | 12 | 100 | 331 | 13.03 | 173 | 6.81 | 213 | 8.39 | 218 | 8.58 | 30 | 66.15 | T4 | A |
| DG120-12 | 12 | 120 | 407 | 16.02 | 174 | 6.85 | 209 | 8.23 | 233 | 9.17 | 33.5 | 73.9 | T4 | A |
| DG150-12 | 12 | 150 | 484 | 19.06 | 170 | 6.69 | 240 | 9.45 | 240 | 9.45 | 43.3 | 95.5 | T5 | A |
| DG200-12 | 12 | 200 | 522 | 20.55 | 240 | 9.45 | 216 | 8.5 | 240 | 9.45 | 57 | 125.69 | T5 | C |
| DG250-12 | 12 | 250 | 520 | 20.47 | 268 | 10.55 | 220 | 8.66 | 243 | 9.57 | 66 | 145.53 | T5 | C |


FURTHER INFORMATION

Please refer to our website www.jarviscell.com for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certificatio, etc.

To ensure safe and efficient operation always refer to the latest edition of our Technical Manual as published on our website.
© 2023 Jarviscell Sdn Bhd. All rights reserved. All trademarks are the property of their respective owners.
All date subject to change without notice E&OE

GE SERIES

GEL AGM Rechargeable VRLA Batteries

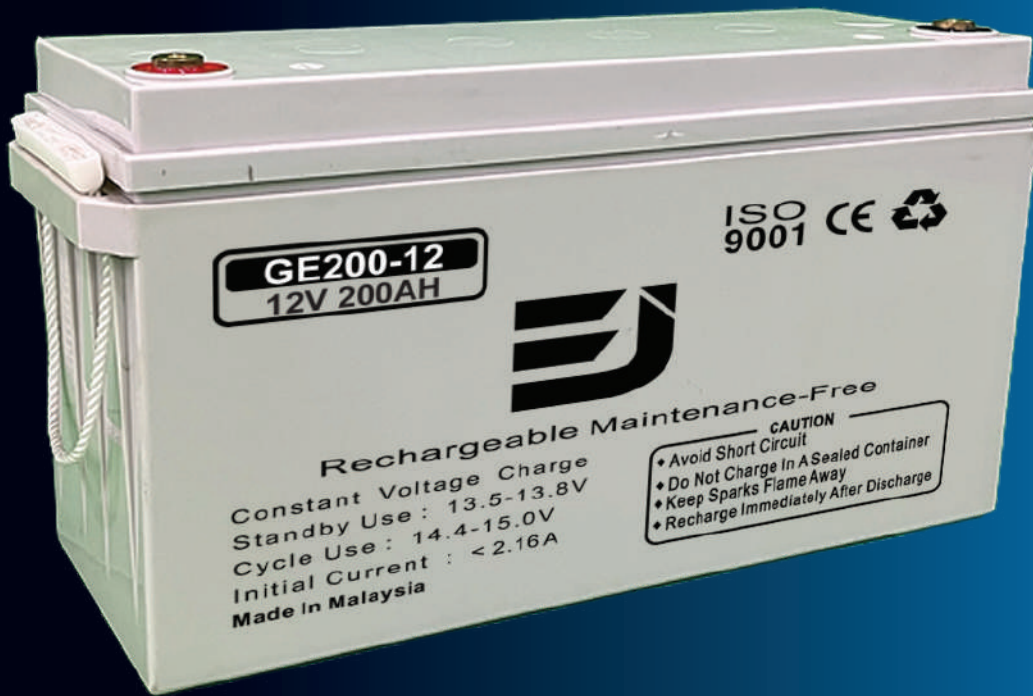

EQUIPMENT



TOYS



UTILITY



TELCO



MEDICAL



EPS



UPS

EJARVIS GEL Series of sealed lead acid batteries have been designed with AGM (Absorbent Glass Mat) technology to ensure superior performance and reliability.

Utilizing silica gel formation the EJARVIS GE series batteries ensure enhanced performance compared to general purpose series battery. The proven silica gel technology can improve battery cycle life and performance at wider temperature range.

Rugged design and built for applications including medical devices, mobility applications, and solar energy.

GE SERIES

Gel AGM Rechargeable VRLA Batteries

BATTERIES WITH :

UL94:HB CASE AND COVER
UL94:V-0 FLAME RETARDANT
CASE AND COVER

FEATURES


- GEL Agm Battery
- Absorbent Glass Mat (AGM) technology for superior performance
- Thixotropic gel electrolyte for enhanced performance
- Power to volume ratio yielding unrivalled energy density
- Better recovery capabilities from deep discharge
- Proven valve regulated technology that guarantees safe operation without maintenance
- Rugged impact resistant ABS case and cover

| Model | Voltage | Capacity | Dimension | | | | | | | | Weight | | Terminal | |
|----------|---------|----------|-----------|-------|-------|-------|--------|------|----------|------|--------|--------|----------|--------|
| | | | Length | | Width | | Height | | T.Height | | kg | Lb | Type | Layout |
| | | | mm | inch | mm | inch | mm | inch | mm | inch | | | | |
| GE33-12 | 12 | 33 | 196 | 7.72 | 131 | 5.16 | 155 | 6.1 | 180 | 7.09 | 10.2 | 22.5 | T2 | A |
| GE40-12 | 12 | 40 | 197 | 7.76 | 165 | 6.5 | 175 | 6.89 | 175 | 6.89 | 13.5 | 29.8 | T2 | B |
| GE50-12 | 12 | 50 | 230 | 9.06 | 138 | 5.43 | 211 | 8.31 | 229 | 9.02 | 15.1 | 33.3 | T2 | A |
| GE65-12 | 12 | 65 | 350 | 13.78 | 168 | 6.61 | 179 | 7.05 | 177 | 6.97 | 19 | 41.89 | T3 | B |
| GE70-12 | 12 | 70 | 260 | 10.24 | 169 | 6.65 | 210 | 8.27 | 219 | 8.62 | 19.4 | 42.8 | T3 | A |
| GE80-12 | 12 | 80 | 260 | 10.24 | 169 | 6.65 | 211 | 8.31 | 219 | 8.62 | 20.78 | 45.8 | T3 | A |
| GE95-12 | 12 | 95 | 306 | 12.05 | 168 | 6.61 | 208 | 8.19 | 214 | 8.43 | 24.6 | 54.2 | T4 | A |
| GE100-12 | 12 | 100 | 331 | 13.03 | 173 | 6.81 | 213 | 8.39 | 218 | 8.58 | 30 | 66.15 | T4 | A |
| GE120-12 | 12 | 120 | 407 | 16.02 | 174 | 6.85 | 209 | 8.23 | 233 | 9.17 | 33.5 | 73.9 | T4 | A |
| GE150-12 | 12 | 150 | 484 | 19.06 | 170 | 6.69 | 240 | 9.45 | 240 | 9.45 | 43.3 | 95.5 | T5 | A |
| GE200-12 | 12 | 200 | 522 | 20.55 | 240 | 9.45 | 216 | 8.5 | 240 | 9.45 | 57 | 125.69 | T5 | C |
| GE250-12 | 12 | 250 | 520 | 20.47 | 268 | 10.55 | 220 | 8.66 | 243 | 9.57 | 66 | 145.53 | T5 | C |

| Model | Voltage | Capacity | Dimension | | | | | | | | Weight | | Terminal | |
|----------|---------|----------|-----------|-------|-------|-------|--------|-------|----------|-------|--------|--------|----------|--------|
| | | | Length | | Width | | Height | | T.Height | | kg | Lb | Type | Layout |
| | | | mm | inch | mm | inch | mm | inch | mm | inch | | | | |
| GE100-2 | 2 | 100 | 171 | 6.73 | 72 | 2.83 | 205 | 8.07 | 210 | 8.27 | 5.5 | 12.13 | T5 | G |
| GE150-2 | 2 | 150 | 171 | 6.73 | 102 | 4.02 | 206 | 8.11 | 221 | 8.7 | 7.4 | 16.31 | T5 | G |
| GE200-2 | 2 | 200 | 171 | 6.73 | 111 | 4.37 | 330 | 12.99 | 364 | 14.33 | 11.5 | 25.35 | T5 | G |
| GE300-2 | 2 | 300 | 171 | 6.73 | 151 | 5.94 | 330 | 12.99 | 364 | 14.33 | 16.2 | 35.71 | T5 | G |
| GE400-2 | 2 | 400 | 210 | 8.27 | 176 | 6.93 | 330 | 12.99 | 367 | 14.45 | 22.6 | 49.82 | T5 | G |
| GE500-2 | 2 | 500 | 241 | 9.49 | 171 | 6.73 | 330 | 12.99 | 365 | 14.37 | 26.5 | 58.42 | T5 | G |
| GE600-2 | 2 | 600 | 302 | 11.89 | 175 | 6.89 | 330 | 12.99 | 367 | 14.45 | 32 | 70.55 | T5 | G |
| GE800-2 | 2 | 800 | 410 | 16.14 | 175 | 6.89 | 330 | 12.99 | 367 | 14.45 | 44 | 97 | T5 | H |
| GE1000-2 | 2 | 1000 | 475 | 18.7 | 175 | 6.89 | 330 | 12.99 | 367 | 14.45 | 52 | 114.6 | T5 | H |
| GE1500-2 | 2 | 1500 | 400 | 15.75 | 350 | 13.78 | 345 | 13.58 | 382 | 15.04 | 85 | 187.31 | T5 | H |
| GE2000-2 | 2 | 2000 | 490 | 19.29 | 350 | 13.78 | 345 | 13.58 | 382 | 15.04 | 106 | 233.7 | T5 | I |
| GE3000-2 | 2 | 3000 | 710 | 27.95 | 350 | 13.78 | 345 | 13.58 | 382 | 15.04 | 152 | 335 | T5 | J |

FT SERIES

Front Terminal AGM Rechargeable VRLA Batteries

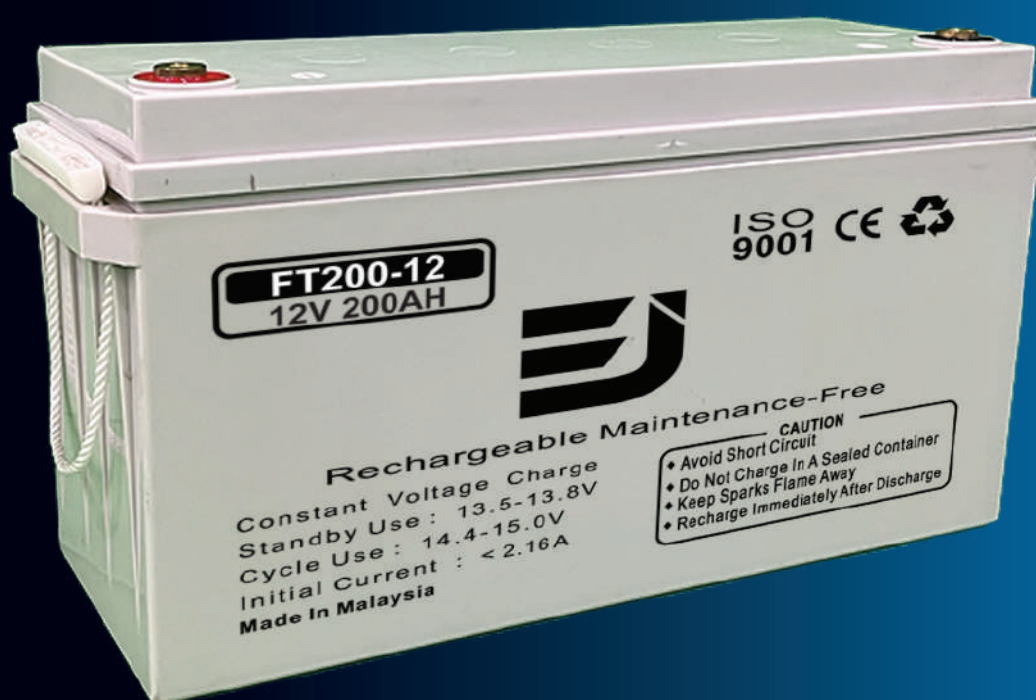

EQUIPMENT



TOYS



UTILITY



TELCO



MEDICAL



EPS



UPS

EJARVIS FT Front Terminal Series of sealed lead acid batteries have been designed with AGM (Absorbent Glass Mat) technology to ensure superior performance and reliability.

With all the benefits you come to expect from the EJARVIS FT series but with the added feature of easy to use front terminal connectors ensuring ease of installation and maintenance when installed in a battery cabinet.

Utilizing cutting-edge refining technology and a thick plate design the FT series have been designed to provide a long service life in critical standby power applications including telecoms, UPS and military power systems.

FT SERIES

Front Terminal AGM Rechargeable VRLA Batteries

BATTERIES WITH : UL94:HB CASE AND COVER UL94:V-0 FLAME RETARDANT CASE AND COVER

FEATURES

- Long services life VRLA battery
- Superb high-rate discharge characteristics ensures reliable performance in UPS and telecom applications
- Absorbent Glass Mat (AGM) technology for superior performance
- Special grid alloy and the use of high purity lead account for superior shelf life characteristics, permitting storage for extended periods of time
- Thick plate design and efficient gas recombination that yeild a design life expantancy of up to 12 years
- Proven valve regulated technology that guarantees safe operation without maintenance
- Rugged impact resistant ABS case and cover

| Model | Voltage | Capacity | Dimension | | | | | | | | Weight | | Terminal | |
|----------|---------|----------|-----------|-------|-------|------|--------|-------|----------|-------|--------|--------|----------|--------|
| | | | Length | | Width | | Height | | T.Height | | kg | Lb | Type | Layout |
| | | | mm | inch | mm | inch | mm | inch | mm | inch | | | | |
| FT50-12 | 12 | 50 | 277 | 10.91 | 106 | 4.17 | 221 | 8.7 | 221 | 8.7 | 16 | 35.27 | T2 | B |
| FT75-12 | 12 | 75 | 562 | 22.13 | 114 | 4.49 | 189 | 7.44 | 189 | 7.44 | 25 | 55.12 | T2 | B |
| FT90-12 | 12 | 90 | 507 | 19.96 | 110 | 4.33 | 224 | 8.82 | 238 | 9.37 | 29 | 62.83 | T4 | B |
| FT100-12 | 12 | 100 | 507 | 19.96 | 110 | 4.33 | 224 | 8.82 | 238 | 9.37 | 30 | 66.14 | T4 | B |
| FT150-12 | 12 | 150 | 552 | 21.73 | 110 | 4.33 | 287 | 11.3 | 287 | 11.3 | 44.5 | 97 | T4 | B |
| FT180-12 | 12 | 180 | 546 | 21.5 | 125 | 4.92 | 317 | 12.48 | 322 | 12.68 | 51 | 112.44 | T4 | B |
| FT200-12 | 12 | 200 | 546 | 21.5 | 125 | 4.92 | 317 | 12.48 | 322 | 12.68 | 55.5 | 122.36 | T4 | B |

FURTHER INFORMATION

Please refer to our website www.jarviscell.com for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certificatio, etc.

To ensure safe and efficient operation always refer to the latest edition of our Technical Manual as published on our website.

© 2023 Jarviscell Sdn Bhd. All rights reserved. All trademarks are the property of their respective owners.

All date subject to change without notice E&OE

HR SERIES

High Rate AGM Rechargeable VRLA Batteries



EQUIPMENT



TOYS



UTILITY



TELCO



MEDICAL



EPS



UPS

EJARVIS HR High Rate Series of sealed lead acid batteries have been designed with AGM (Absorbent Glass Mat) technology to ensure superior performance and reliability.

EJARVIS high-rate HR series provide constant power packup that UPS systems and critical backup applications require.

The HR series has been designed and develop specifically for high-rate discharge application to ensure constant, dependable power when used as battery backupor as part of the UPS system

HR SERIES

High Rate AGM Rechargeable VRLA Batteries

BATTERIES WITH :

UL94:HB CASE AND COVER
UL94:V-0 FLAME RETARDANT
CASE AND COVER

FEATURES

- High-rate VRLA battery
- Specifically designed for high-rat UPS and critical power backup applications
- Lead calcium alloy grids and the use of high purity lead account for superior shelf-life characteristics
- Valve regulated, maintenance free spill proof construction
- Precision plate pasting for higher consistency with 100% load testing to ensure uniform capacity
- High rated of charge and discharge
- Rugged impact resistant ABS case and cover

| Model | Voltage | Capacity | Dimension | | | | | | | | Weight | | Terminal |
|----------|---------|----------|-----------|-------|-------|-------|--------|------|----------|------|--------|--------|----------|
| | | | Length | | Width | | Height | | T.Height | | kg | Lb | Type |
| | | | mm | inch | mm | inch | mm | inch | mm | inch | | | |
| HR1221W | 12 | 21 | 90 | 3.54 | 70 | 2.76 | 101 | 3.98 | 106 | 4.17 | 1.5 | 3.31 | F1/F2 |
| HR1226W | 12 | 26 | 151 | 5.94 | 65 | 2.56 | 94 | 3.7 | 100 | 3.94 | 2.18 | 4.19 | F1/F2 |
| HR1228W | 12 | 28 | 151 | 5.94 | 65 | 2.56 | 94 | 3.7 | 100 | 3.94 | 2.25 | 4.96 | F1/F2 |
| HR1233W | 12 | 33 | 151 | 5.94 | 65 | 2.56 | 94 | 3.7 | 100 | 3.94 | 2.35 | 5.18 | F1/F2 |
| HR1234W | 12 | 34 | 151 | 5.94 | 65 | 2.56 | 94 | 3.7 | 100 | 3.94 | 2.55 | 5.62 | F1/F2 |
| HR1235W | 12 | 35 | 151 | 5.94 | 65 | 2.56 | 94 | 3.7 | 100 | 3.94 | 2.47 | 5.44 | F1/F2 |
| HR1237W | 12 | 37 | 151 | 5.94 | 65 | 2.56 | 94 | 3.7 | 100 | 3.94 | 2.57 | 5.66 | F1/F2 |
| HR1248W | 12 | 48 | 151 | 5.94 | 98 | 3.86 | 94 | 3.7 | 100 | 3.94 | 3.5 | 7.72 | F1/F2 |
| HR1255W | 12 | 55 | 152 | 5.98 | 99 | 3.9 | 95 | 3.74 | 100 | 3.94 | 3.65 | 8.04 | B1/T1 |
| HR1268W | 12 | 68 | 181 | 7.13 | 77 | 3.03 | 167 | 6.57 | 167 | 6.57 | 5.3 | 11.68 | B1/T1 |
| HR1296W | 12 | 96 | 166 | 6.54 | 175 | 6.89 | 125 | 4.92 | 127 | 5 | 7.8 | 17.2 | B2/T1 |
| HR12112W | 12 | 112 | 165 | 6.49 | 126 | 4.96 | 173 | 6.81 | 173 | 6.81 | 8.4 | 18.52 | T2 |
| HR12125W | 12 | 125 | 196 | 7.72 | 131 | 5.16 | 155 | 6.1 | 180 | 7.09 | 10.2 | 22.49 | T2 |
| HR12150W | 12 | 150 | 197 | 7.76 | 165 | 6.5 | 175 | 6.89 | 175 | 6.89 | 13.5 | 29.76 | T2 |
| HR12165W | 12 | 165 | 198 | 7.79 | 167 | 6.57 | 173 | 6.81 | 173 | 6.81 | 12.44 | 27.34 | T2 |
| HR12185W | 12 | 185 | 230 | 9.06 | 138 | 5.43 | 211 | 8.31 | 229 | 9.02 | 15.1 | 33.29 | T2 |
| HR12200W | 12 | 200 | 230 | 9.06 | 139 | 5.47 | 210 | 8.27 | 215 | 8.46 | 16 | 35.27 | T2 |
| HR12260W | 12 | 260 | 348 | 13.7 | 168 | 6.61 | 177 | 6.97 | 177 | 6.97 | 20.8 | 45.85 | T3 |
| HR12275W | 12 | 275 | 348 | 13.7 | 168 | 6.61 | 177 | 6.97 | 177 | 6.97 | 21.3 | 46.95 | T3 |
| HR12280W | 12 | 280 | 260 | 10.24 | 169 | 6.65 | 211 | 8.31 | 215 | 8.46 | 23 | 50.71 | T3 |
| HR12330W | 12 | 330 | 307 | 12.09 | 169 | 6.65 | 208 | 8.19 | 212 | 8.35 | 28 | 61.73 | T4 |
| HR12380W | 12 | 380 | 331 | 13.03 | 173 | 6.81 | 213 | 8.39 | 218 | 8.58 | 30 | 66.14 | T4 |
| HR12430W | 12 | 430 | 407 | 16.02 | 174 | 6.85 | 209 | 8.23 | 233 | 9.17 | 33 | 72.75 | T4 |
| HR12460W | 12 | 460 | 406 | 15.98 | 173 | 6.81 | 215 | 8.46 | 233 | 9.17 | 36.2 | 79.8 | T4 |
| HR12510W | 12 | 510 | 484 | 19.06 | 170 | 6.69 | 240 | 9.45 | 240 | 9.45 | 41 | 90.39 | T5 |
| HR12730W | 12 | 730 | 522 | 20.55 | 240 | 9.45 | 221 | 8.7 | 226 | 8.9 | 59.8 | 131.83 | T5 |
| HR12760W | 12 | 760 | 522 | 20.55 | 240 | 9.45 | 221 | 8.7 | 226 | 8.9 | 60.9 | 134.26 | T5 |
| HR12800W | 12 | 800 | 522 | 20.55 | 240 | 9.45 | 221 | 8.7 | 226 | 8.9 | 63.5 | 139.99 | T5 |
| HR12870W | 12 | 870 | 522 | 20.55 | 268 | 10.55 | 220 | 8.66 | 225 | 8.85 | 74.2 | 163.58 | T5 |

OPzV SERIES

OPzV AGM Rechargeable VRLA Batteries



EQUIPMENT



TOYS



UTILITY



TELCO



MEDICAL



EPS



UPS

EJARVIS OPzV Series of sealed lead acid batteries have been designed with AGM (Absorbent Glass Mat) technology to ensure superior performance and reliability.

Engineered with an innovative tubular plate design, EJARVIS EJ-OPzV valve regulated lead acid batteries provide greater capacity and enhanced cycle life .

The OPzV batteries have been specifically designed for longer life , greater reliability and strong resilience to high temperatures making them ideal for critical power applications and energy storage.

OPzV SERIES

OPzV AGM Rechargeable VRLA Batteries

BATTERIES WITH :

UL94:HB CASE AND COVER
UL94:V-0 FLAME RETARDANT
CASE AND COVER

FEATURES

- OPzV tubular plate gel battery
- Single cell gel with tubular plate technology giving superior cyclic performance
- Up to 20 years design life
- Excellent deep discharge recovery
- Easy installation in vertical or horizontal position
- Proven valve regulated technology that guarantees safe operation without maintenance
- Rugged impact resistant ABS case and cover

| Model | Voltage | Capacity | Dimension | | | | | | | | Weight | | Terminal |
|------------|---------|----------|-----------|-------|-------|------|--------|-------|----------|-------|--------|-------|----------|
| | | | Length | | Width | | Height | | T.Height | | kg | Lb | Type |
| | | | mm | inch | mm | inch | mm | inch | mm | inch | | | |
| OPzV100-2 | 2 | 100 | 103 | 4.06 | 206 | 8.11 | 355 | 13.98 | 390 | 15.35 | 13.5 | 29.8 | T5 |
| OPzV150-2 | 2 | 150 | 103 | 4.06 | 206 | 8.11 | 355 | 13.98 | 390 | 15.35 | 16 | 35.3 | T5 |
| OPzV200-2 | 2 | 200 | 103 | 4.06 | 206 | 8.11 | 355 | 13.98 | 390 | 15.35 | 20 | 44.1 | T5 |
| OPzV250-2 | 2 | 250 | 124 | 4.88 | 206 | 8.11 | 355 | 13.98 | 390 | 15.35 | 23.5 | 51.8 | T5 |
| OPzV300-2 | 2 | 300 | 145 | 5.71 | 206 | 8.11 | 355 | 13.98 | 390 | 15.35 | 28 | 61.7 | T5 |
| OPzV350-2 | 2 | 350 | 124 | 4.88 | 206 | 8.11 | 471 | 18.54 | 506 | 19.92 | 29.5 | 65 | T5 |
| OPzV420-2 | 2 | 420 | 145 | 5.71 | 206 | 8.11 | 471 | 18.54 | 506 | 19.92 | 35 | 77.2 | T5 |
| OPzV490-2 | 2 | 490 | 166 | 6.54 | 206 | 8.11 | 471 | 18.54 | 506 | 19.92 | 41 | 90.4 | T5 |
| OPzV600-2 | 2 | 600 | 145 | 5.71 | 206 | 8.11 | 646 | 25.43 | 681 | 26.81 | 49 | 108 | T5 |
| OPzV800-2 | 2 | 800 | 191 | 7.52 | 210 | 8.27 | 646 | 25.43 | 681 | 26.81 | 65 | 143.3 | T5 |
| OPzV1000-2 | 2 | 1000 | 233 | 9.17 | 210 | 8.27 | 646 | 25.43 | 681 | 26.81 | 78 | 172 | T5 |
| OPzV1200-2 | 2 | 1200 | 275 | 10.83 | 210 | 8.27 | 646 | 25.43 | 681 | 26.81 | 93 | 205 | T5 |
| OPzV1500-2 | 2 | 1500 | 275 | 10.83 | 210 | 8.27 | 796 | 31.34 | 831 | 32.72 | 117 | 257.9 | T5 |
| OPzV2000-2 | 2 | 2000 | 399 | 15.71 | 210 | 8.27 | 772 | 30.39 | 807 | 31.77 | 155 | 341.7 | T5 |
| OPzV2500-2 | 2 | 2500 | 487 | 19.17 | 212 | 8.35 | 772 | 30.39 | 807 | 31.77 | 192 | 423.3 | T5 |
| OPzV3000-2 | 2 | 3000 | 576 | 22.68 | 212 | 8.35 | 772 | 30.39 | 807 | 31.77 | 228 | 502.7 | T5 |

FURTHER INFORMATION

Please refer to our website www.jarviscell.com for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc.

To ensure safe and efficient operation always refer to the latest edition of our Technical Manual as published on our website.

© 2023 Jarviscell Sdn Bhd. All rights reserved. All trademarks are the property of their respective owners.

All data subject to change without notice E&OE

PG+ 2V SERIES

Prolong Life AGM Rechargeable VRLA Batteries



EQUIPMENT



TOYS



UTILITY



TELCO



MEDICAL



EPS



UPS

EJARVIS PG+ Prolong Life Series of sealed lead acid batteries have been designed with AGM (Absorbent Glass Mat) technology to ensure superior performance and reliability.

Introducing the latest power wave frame technology and use of high purity lead, the EJARVIS PG series provides a longer design life for those critical standby power applications.

The long life lead acid battery has been specifically designed to offer superb high-rate discharge characteristics ensuring reliable performance in a number of applications including UPS, telecom and emergency lighting. The rugged impact resistant battery is available to UL94:V0 flame retardant rating.

PG+ 2V SERIES

Prolong Life AGM Rechargeable VRLA Batteries

BATTERIES WITH :

UL94:HB CASE AND COVER UL94:V-0 FLAME RETARDANT CASE AND COVER

FEATURES

- High capacity long service life VRLA battery
- Superb high-rate discharge characteristics ensures reliable performance in UPS and telecom applications
- Absorbent Glass Mat (AGM) technology for superior performance
- Special grid alloy and the use of high purity lead account for superior shelf life characteristics, permitting storage for extended periods of time
- Thick plate design and efficient gas recombination that yield a design life expectancy of up to 12 years
- Proven valve regulated technology that guarantees safe operation without maintenance
- Rugged impact resistant ABS case and cover

| Model | Voltage | Capacity | Dimension | | | | | | | | Weight | | Terminal |
|----------|---------|----------|-----------|-------|-------|------|--------|-------|----------|-------|--------|-------|----------|
| | | | Length | | Width | | Height | | T.Height | | kg | Lb | Type |
| | | | mm | inch | mm | inch | mm | inch | mm | inch | | | |
| PG100-2 | 2 | 100 | 103 | 4.06 | 206 | 8.11 | 355 | 13.98 | 390 | 15.35 | 13.5 | 29.8 | T5 |
| PG150-2 | 2 | 150 | 103 | 4.06 | 206 | 8.11 | 355 | 13.98 | 390 | 15.35 | 16 | 35.3 | T5 |
| PG200-2 | 2 | 200 | 103 | 4.06 | 206 | 8.11 | 355 | 13.98 | 390 | 15.35 | 20 | 44.1 | T5 |
| PG250-2 | 2 | 250 | 124 | 4.88 | 206 | 8.11 | 355 | 13.98 | 390 | 15.35 | 23.5 | 51.8 | T5 |
| PG300-2 | 2 | 300 | 145 | 5.71 | 206 | 8.11 | 355 | 13.98 | 390 | 15.35 | 28 | 61.7 | T5 |
| PG350-2 | 2 | 350 | 124 | 4.88 | 206 | 8.11 | 471 | 18.54 | 506 | 19.92 | 29.5 | 65 | T5 |
| PG420-2 | 2 | 420 | 145 | 5.71 | 206 | 8.11 | 471 | 18.54 | 506 | 19.92 | 35 | 77.2 | T5 |
| PG490-2 | 2 | 490 | 166 | 6.54 | 206 | 8.11 | 471 | 18.54 | 506 | 19.92 | 41 | 90.4 | T5 |
| PG600-2 | 2 | 600 | 145 | 5.71 | 206 | 8.11 | 646 | 25.43 | 681 | 26.81 | 49 | 108 | T5 |
| PG800-2 | 2 | 800 | 191 | 7.52 | 210 | 8.27 | 646 | 25.43 | 681 | 26.81 | 65 | 143.3 | T5 |
| PG1000-2 | 2 | 1000 | 233 | 9.17 | 210 | 8.27 | 646 | 25.43 | 681 | 26.81 | 78 | 172 | T5 |
| PG1200-2 | 2 | 1200 | 275 | 10.83 | 210 | 8.27 | 646 | 25.43 | 681 | 26.81 | 93 | 205 | T5 |
| PG1500-2 | 2 | 1500 | 275 | 10.83 | 210 | 8.27 | 796 | 31.34 | 831 | 32.72 | 117 | 257.9 | T5 |
| PG2000-2 | 2 | 2000 | 399 | 15.71 | 210 | 8.27 | 772 | 30.39 | 807 | 31.77 | 155 | 341.7 | T5 |
| PG2500-2 | 2 | 2500 | 487 | 19.17 | 212 | 8.35 | 772 | 30.39 | 807 | 31.77 | 192 | 423.3 | T5 |
| PG3000-2 | 2 | 3000 | 576 | 22.68 | 212 | 8.35 | 772 | 30.39 | 807 | 31.77 | 228 | 502.7 | T5 |

FURTHER INFORMATION

Please refer to our website www.jarviscell.com for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc.


To ensure safe and efficient operation always refer to the latest edition of our Technical Manual as published on our website.

© 2023 Jarviscell Sdn Bhd. All rights reserved. All trademarks are the property of their respective owners.

All data subject to change without notice E&OE

PG+12V SERIES

Prolong Life AGM Rechargeable VRLA Batteries

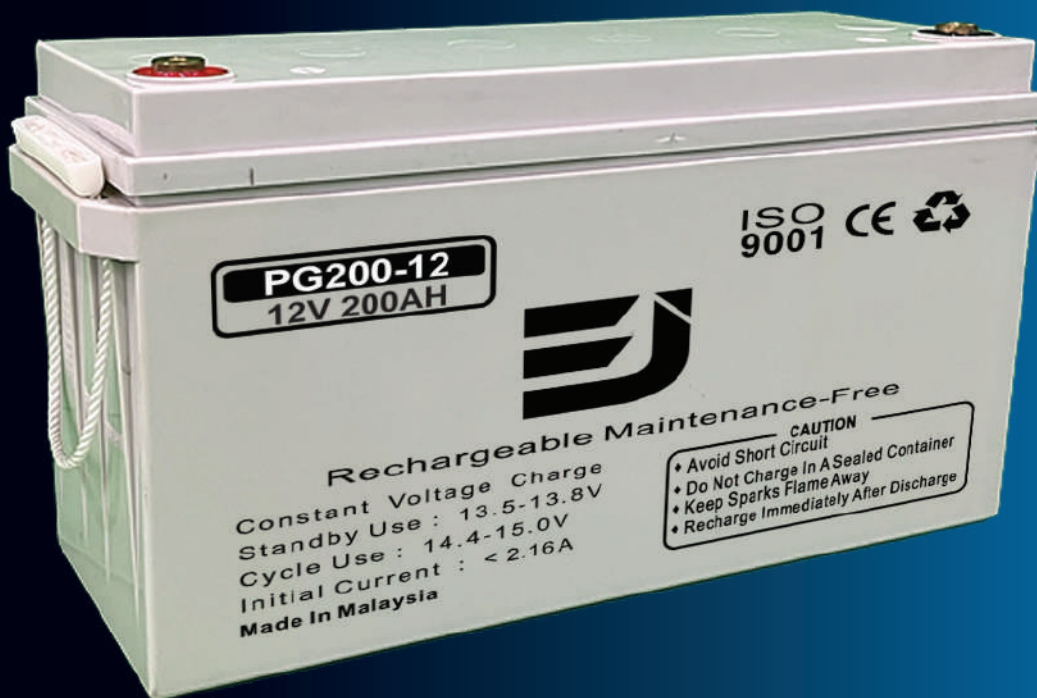

EQUIPMENT



TOYS



UTILITY



TELCO



MEDICAL



EPS



UPS

EJARVIS PG+ Prolong Life Series of sealed lead acid batteries have been designed with AGM (Absorbent Glass Mat) technology to ensure superior performance and reliability.

Introducing the latest power wave frame technology and use of high purity lead, the EJARVIS PG series provides a longer design life for those critical standby power applications.

The long life lead acid battery has been specifically designed to offer superb high-rate discharge characteristics ensuring reliable performance in a number of applications including UPS, telecom and emergency lighting. The rugged impact resistant battery is available to UL94:V0 flame retardant rating.

PG+ 2V SERIES

Prolong Life AGM Rechargeable VRLA Batteries

BATTERIES WITH :

UL94:HB CASE AND COVER UL94:V-0 FLAME RETARDANT CASE AND COVER

FEATURES

- High capacity long service life VRLA battery
- Superb high-rate discharge characteristics ensures reliable performance in UPS and telecom applications
- Absorbent Glass Mat (AGM) technology for superior performance
- Special grid alloy and the use of high purity lead account for superior shelf life characteristics, permitting storage for extended periods of time
- Thick plate design and efficient gas recombination that yield a design life expectancy of up to 12 years
- Proven valve regulated technology that guarantees safe operation without maintenance
- Rugged impact resistant ABS case and cover

| Model | Voltage | Capacity | Dimension | | | | | | | | Weight | | Terminal | |
|----------|---------|----------|-----------|-------|-------|------|--------|------|----------|------|--------|--------|----------|--------|
| | | | Length | | Width | | Height | | T.Height | | kg | Lb | Type | Layout |
| | | | mm | inch | mm | inch | mm | inch | mm | inch | | | | |
| PG65-12 | 12 | 65 | 350 | 13.78 | 178 | 7.01 | 179 | 7.05 | 179 | 7.05 | 19 | 41.89 | T3 | B |
| PG70-12 | 12 | 70 | 260 | 10.24 | 169 | 6.65 | 210 | 8.27 | 214 | 8.43 | 21 | 46.29 | T3 | A |
| PG80-12 | 12 | 80 | 260 | 10.24 | 169 | 6.65 | 211 | 8.31 | 215 | 8.46 | 23 | 50.71 | T3 | A |
| PG90-12 | 12 | 90 | 307 | 12.09 | 169 | 6.65 | 208 | 8.19 | 212 | 8.35 | 25 | 55.1 | T4 | A |
| PG100-12 | 12 | 100 | 331 | 13.03 | 173 | 6.81 | 213 | 8.39 | 218 | 8.58 | 30 | 66.15 | T4 | A |
| PG120-12 | 12 | 120 | 407 | 16.02 | 174 | 6.85 | 209 | 8.23 | 233 | 9.17 | 33.5 | 73.9 | T4 | A |
| PG150-12 | 12 | 150 | 484 | 19.06 | 170 | 6.69 | 240 | 9.45 | 240 | 9.45 | 43.3 | 95.5 | T5 | A |
| PG200-12 | 12 | 200 | 522 | 20.55 | 240 | 9.45 | 216 | 8.5 | 240 | 9.45 | 57 | 125.69 | T5 | C |

FURTHER INFORMATION

Please refer to our website www.jarviscell.com for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc.

To ensure safe and efficient operation always refer to the latest edition of our Technical Manual as published on our website.

© 2023 Jarviscell Sdn Bhd. All rights reserved. All trademarks are the property of their respective owners.

All data subject to change without notice E&OE



EJARVIS
ECO GREEN TECHNOLOGY BATTERY

Contact Us:



+6018-230-7718
+603-8948-8388



www.jarviscell.com



27, Jalan BS 9/10, Seksyen 9, Taman
Perindustrian Bukit Serdang, 43300
Seri Kembangan, Selangor